


THE ULTIMATE PRINTER FOR YOUR BUSINESS



Robust and reliable. These are the EcoTank L6460 and L6490. Compact in size, the printers fit into any given space in your office. Enjoy hassle-free, auto-duplex printing that lowers printing cost; and face down output for better security. DURABrite ET Ink uses pigment-based ink to deliver durable, water-resistant and extra-sharp print. You can also download the Epson Smart Panel app and transform your mobile devices into an intuitive control centre to set up, monitor and operate the printers. Improve business efficiency with enhanced print performance from this stylish printing solution today.

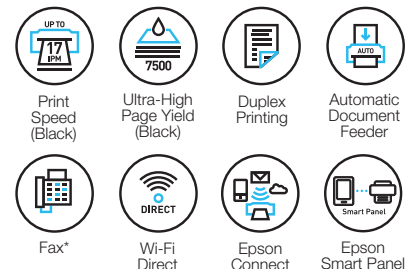

Prints start from
12 PAISE



Versatility meets Productivity

Super compact printer which fits any business environment with fast print speed of up to 17.0 ipm (black) and 9.5 ipm (colour).

Save on Consumables

Enjoy remarkably low cost per print with high page yield of up to 7,500 pages for black and white and up to 6,000 pages for colour.

Care for Environment

With Epson Heat-free technology, less power is required to operate the EcoTank as compared to laser printer, reducing environmental impact.

SPECIFICATIONS

Product Name	L6460	L6490
Printer Type	Print, Scan, Copy with ADF	Print, Scan, Copy, Fax with ADF
Printing	PrecisionCore Printhead	
Printing Technology	400 x 1 nozzles (Black), 128 x 1 nozzles per Colour (Cyan, Magenta, Yellow)	
Nozzle Configuration	4800 x 1200 dpi	
Maximum Resolution	4800 x 1200 dpi	
Print Speed ¹	Up to 37.0 ppm / 23.0 ppm	
Draft Text - Memo, A4 (Black ^{#1} / Colour ^{#2})	Simplex: Up to 17.0 ipm / 9.5 ipm Duplex: Up to 7.5 ipm / 5.0 ipm	
ISO 24734, A4 (Black / Colour)	Simplex: Up to 7.0 sec / 11.0 sec	
First Page Out Time (Black / Colour)	ESC/P-R, ESC/P Raster	
Printer Language	Yes (A4 size)	
Automatic 2-sided printing	Yes (A4 size)	
Copying		
Copy Speed	Simplex: Up to 12.0 ipm / 6.0 ipm	
ISO 29183, A4 (Black / Colour), Flatbed	Simplex: Up to 10.0 ipm / 4.5 ipm	
ISO 24735, A4 (Black / Colour), ADF	99 copies	
Maximum Copies from Standalone	25 - 400%	
Reduction / Enlargement	600 x 600 dpi	
Maximum Copy Resolution	Legal	
Maximum Copy Size		
Scanning		
Scanner Type	Flatbed colour image scanner	
Sensor Type	CIS	
Optical Resolution	1200 x 2400 dpi	
Maximum Scan Area	216 x 297 mm	
Scanner Bit Depth		
Colour	48-bit input, 24-bit output	
Grayscale	16-bit input, 8-bit output	
Black & White	16-bit input, 1-bit output	
Scan Speed (Flatbed / ADF (Simplex))		
Monochrome 200dpi	Flatbed: Up to 12 sec / ADF: Up to 6.0 ipm	
Colour 200dpi	Flatbed: Up to 27 sec / ADF: Up to 5.0 ipm	
Fax Function		
Type of Fax	N/A	Walk-up B/W and Colour Fax Capability
Receive Memory / Page Memory	N/A	2MB, Page memory up to 180 pages
Error Correction Mode	N/A	ITU-T T.30
Fax Speed (Data Transfer Rate)	N/A	Up to 33.6 kbps, Approx. 3 sec/page
Fax Resolution	N/A	Up to 200 x 200 dpi
Transmission Paper Size		
Flatbed	N/A	Letter, A4
ADF	N/A	Letter, A4, 8.5 x 13", Legal
Receiving Paper Size	N/A	Letter, A4, Legal
Speed Dial / Group Dial	N/A	Up to 100 numbers, 99 groups
Fax Features	N/A	PC Fax (Transmission / Receive), Automatic Redial, Address book, Broadcast Fax (Mono Only), Transmit Reservation, Polling Reception, Fax Preview
ADF Function		
Support Paper Thickness	64-95 g/m ²	
Paper Capacity	35 sheets (A4 Paper), 10 sheets (Legal)	
Paper Handling		
Number of Paper Trays	2 (Front 1, Rear 1)	
Paper Hold Capacity		
Input Capacity	Cassette 1: Up to 250 sheets of Plain Paper (80 g/m ²), up to 20 sheets of Premium Glossy Photo Paper. Rear Slot: 1 sheet (80 g/m ²)	
Output Capacity	Up to 30 sheets of Plain Paper (80 g/m ²) Up to 20 sheets of Premium Glossy Photo Paper	
Paper Size	Legal, Indian Legal, Letter, A4, 16K (195 x 270 mm), B5, A5, B6, A6, Hagaki (100 x 148 mm), 8.5 x 13", 5 x 7", 4 x 6", Legal (8.5 x 14") Envelopes: #10, DL, C6	
Maximum Paper Size	215.9 x 1200 mm	
Print Margin	3 mm top, left, right, bottom via custom settings in printer driver	
Interface		
USB	USB 2.0	
Network	Wireless IEEE 802.11b/g/n, Wi-Fi Direct, Ethernet	
Network Protocol	TCP/IPv4, TCP/IPv6	
Network Management Protocols	SNMP, HTTP, DHCP, BOOTP, APIPA, PING, DDNS, mDNS, Sntp, SLP, WSD, LLTD	
Mobile and Cloud Printing		
Epson Connect	Epson iPrint, Epson Email Print, Remote Print Driver, Scan to Cloud	
Other Mobile Solutions	Apple AirPrint, Mopria Print Service, Epson Smart Panel	
Control Panel		
LCD Screen	2.4" Colour LCD Touch Screen	
Printer Software		
Software Support	Epson ScanSmart	
Operating System Compatibility	Windows XP / XP Professional / Vista / 7 / 8 / 8.1 / 10 Windows Server 2003 / 2008 / 2012 / 2016 Mac OS X 10.6.8 or later	
Electrical Specifications		
Rated Voltage	AC 220-240 V	
Rated Frequency	50-60 Hz	
Power Consumption	12.0 W (Operating), 5.4 W (Standby), 0.9 W (Sleep), 0.2 W (Power Off)	12.0 W (Operating), 5.5 W (Standby), 0.9 W (Sleep), 0.2 W (Power Off)
Noise Level		
PC Printing / Plain Paper Default ²	Sound Power (Black / Colour) 6.4 / 6.8 B(A), Sound Pressure (Black / Colour) 51 / 55 dB(A)	
Consumables	Page Yield³	Order Code
Black Ink Bottle 127 mL	7,500	C13T06G198
Cyan Ink Bottle 70 mL	6,000 (Composite Yield)	C13T06G298
Magenta Ink Bottle 70 mL		C13T06G398
Yellow Ink Bottle 70 mL		C13T06G498
User Replaceable Maintenance Box	Yes	C13T04D100

Dimensions & Weight

L6460 (SKU C11CJ89503)
Weight: 7.3 kg



L6490 (SKU C11CJ88503)
Weight: 7.3 kg



¹ Print speed (Pages Per Minute) is calculated when printed on A4 plain paper in the fastest mode, 10 x 15 cm photo print speed when printed on Epson Premium Glossy Photo Paper. Print speed may vary depending on system configuration, print mode, document complexity, software, type of paper used and connectivity. Print speed does not include processing time on host computer. Glossy paper drying time in minimum 24 hours as the inks used are pigment-based.



² Default mode in accordance with ISO7779 for MFPs.

³ Quoted yields are based on the ISO 24711/24712 patterns of mixed text and colour graphics with Epson methodology. Quoted yields are based on the replacement ink bottles purchased. For print quality, part of the ink from the included bottles is used for printer startup so yields could be lower than those of replacement ink bottles. Actual yields will vary due to reasons including images printed, print settings, temperature and humidity. Yields may be lower when printing infrequently or predominantly with one ink colour. Ink is used for both printing and printhead maintenance. All inks are used for both black and colour printing.

© 2021 Epson India Pvt. Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited. EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation. All other products names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Print samples shown are simulations only. Specifications and product availability are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing
Printed September 2021



Epson Helpline: For product info or service - 1800 425 0011
For service - 1800 123 001 600 or 1860 300 016 000 (9AM - 6PM) (Mon- Sat)
Email: think@eid.epson.co.in

www.epson.co.in

Regional Offices:

Ahmedabad - 3314 8500/01, Chennai - 3967 7500, Ernakulam - 4012 315, Coimbatore - 98942 19200,
Kolkata - 4603 4729, Mumbai - 3079 8200, New Delhi - 3312 0300, Pune - 3028 6000/05,
Hyderabad - 4857 0032, Jaipur - 0141 4923119